




LANDING PLATE FIXING INSTRUCTIONS

PLAN VIEW

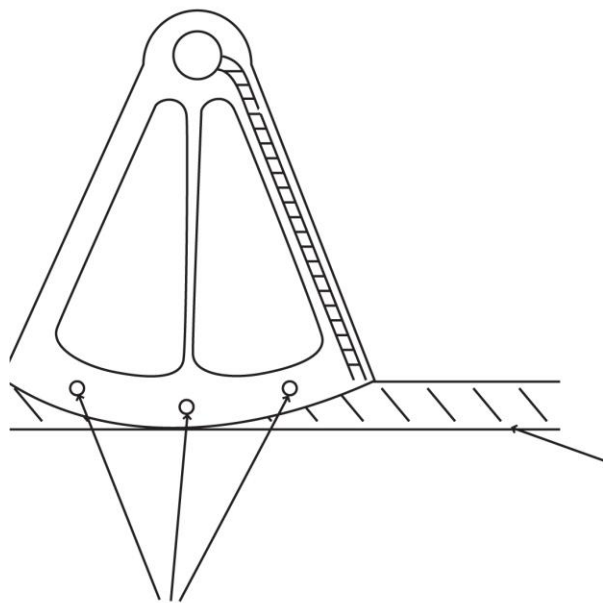


Handrail section to protect back of plate (ordered separately to plate)

The back of the landing plate is left undrilled so that accurate baluster configuration can be calculated on site. To fix balusters either drill plate with 15mm bit and fasten baluster with 1/2" whit nut or tap plate for 1/2" whit and screw in baluster. Cut off excess threaded rod

Joist at edge of landing

Drill holes in plate and fix with 12mm coach bolt or nut and bolt to joist

SECTION VIEW

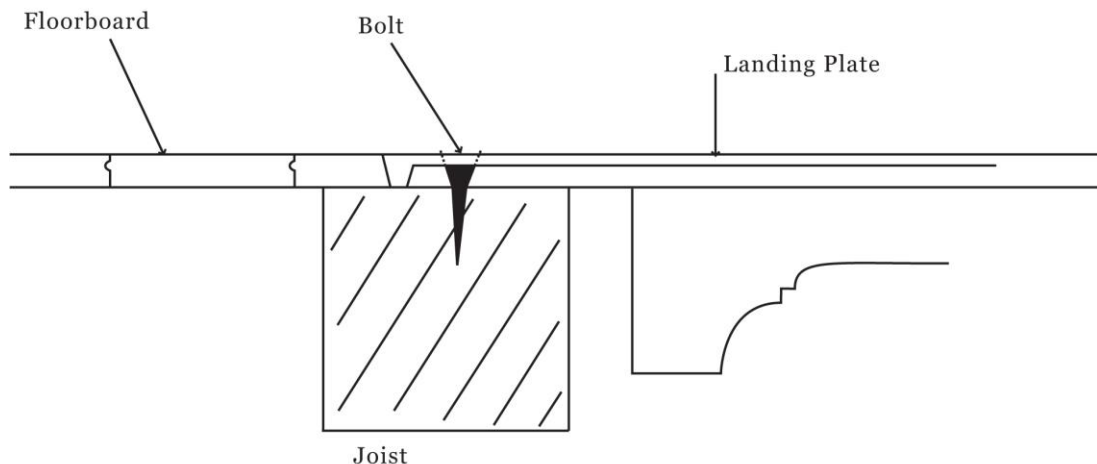

British Spirals & Castings

Peak Building, Eccles Rd, Chapel-en-le-Frith, High Peak, SK23 9RG

T +44(0)1663 750716 **E** sales@britishsc.co.uk **www.britishsc.co.uk**

A trading division of Harding Sales Ltd. Registered Office: Gorsty Low Farm, The Wash, Chapel-en-le-Frith, SK23 0QL. Company Registration Number: 7550371

A FOUNDING MEMBER OF
The Spiral Manufacturers Association